

Standard Features

MODEL	GB-C40
Standby Power(60Hz)	35KW/44KVA
Prime Power(60Hz)	32KW/40KVA
Engine	Cummins 4BT3.9-G2
Alternator	STAMFORD PI144J

- **Engine(CCEC Cummins 4BT3.9-G2)**
- Radiator 40°C max, fans are driven by belt, with safety guard
- 24V charge alternator
- **Alternator(STAMFORD PI144J),**
- single bearing alternator, Protection Class IP22, insulation class H/H
- Dry Type air filter, fuel filter, oil filter, pre-filter, absorber
- Main line circuit breaker
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, Exhaust siphon, flange, muffler
- Operation manual



Generator Set Ratings						
Voltage	Frequency	Phase	P.F (COS ϕ)	Standby Amps	Standby Ratings (KW/KVA)	Prime Ratings (KW/KVA)
220/127	60	3	0.8	115	35/44	32/40
208/120	60	3	0.8	121	35/44	32/40

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (equiv ISO8528); A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency

Dimension Of Generator Set	
Dimension(L*W*H)/CM For Open Type	180×75×135CM
Net Weight/KG For Open Type	876KG
Dimension(L*W*H)/CM For Sound Proof Type	223×106×168 CM
Net Weight/KG For Sound Proof Type	1200KG
Dimension (L*W*H)/MM For Trailer Type	
Net Weight/KG For Trailer Type	

Specification Of Engine		
Engine	Engine Model	4BT3.9-G2
	Manufacturer	DCEC Cummins
	Prime Power	40KW/53.6HP
	Standby Power	44KW/59HP
	Engine Configuration	4Cylinder In Line, 4Stroke
	Gas Feeding Model	Turbocharged
	Bore×Stroke	102×120 (MM)
	Displacement	3.9L
	Rated Speed	1800RPM
	Speed Governor	Electronic
	Starter Model	24V DC Start
	Fuel Consumption Standby Power (100% load)	214 g/Kw.h
	Fuel Consumption Prime Power (75% load)	223 g/Kw.h
	Oil Consumption	≤4 g/kwh
	Cooling System	Water Cool
	Compression Ratio	16.5:1
	Max Back Pressure	10KPA
	Max Intake Restriction	6.35KPA
Exhaust Temperature	487℃	

Specification Of Alternator

Alternator	Alternator Model	PI144J
	Manufacturer	STAMFORD company
	Prime Output	32KW/40KVA
	Standby Output	35KW/44KVA
	Excitation Model	Brushless, Self-Exciting
	Cooling Method	Air Cooling
	Connection Type	3 Phase and 12 Wires "Star" Connection
	Power Factor	0.8
	Protection Class	IP22
	Insulation Class	H
	Altitude	≤1000m
	Voltage Regulation, Steady State	≤ ± 1%
	Telephone Influence Factor	< 50
	Sudden Voltage Warp (100% Sudden Reduce)	≤ ± 1%
	Sudden Voltage Warp (Sudden Increase)	≤ ± 25%
	Voltage Stable Time (100% Sudden Reduce)	≤ 6S
	Voltage Stable Time (Sudden Increase)	≤ 6S
	Frequency Reduce	0-5% adjustable
	Frequency Regulation, Stead State	≤ 1.5%
	Frequency Waving	≤ 0.8%
Sudden Frequency Warp (100% Sudden Reduce)	≤ +12%	
Sudden Frequency Warp (100% Sudden Increase)	≤ -10%	
Frequency Recovery Time (100% Sudden Reduce)	≤ 5S	
Frequency Recovery Time (Sudden Increase)	≤ 5S	
Compliance Stands	GB755,BS5000,VDE0530,NEMAMG1-22,IED34-1,CSA22.2 and AS1359	

Control Panel System




MONICAN CONTROL MODEL/ MANUAL OR ATS USE
 With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop

Parameters of Operation:

1. Emergency Stop Button
- 2.Voltmeter and Selector Switch
3. Ammeter and Selector Switch
4. Frequency Meter
5. Hour Running Meter
- 6.Alart Buzzer

Control Panel System

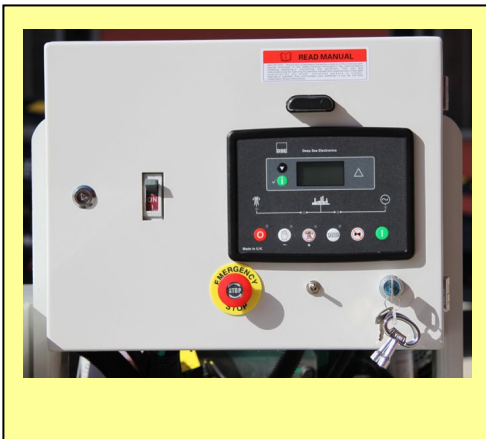

SMARTGEN CONTROL MODEL/ MANUAL OR ATS USE
 USE

With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop

Parameters of Operation:

Digital type, all function showed by LED

Control Panel System



DEEPSEA CONTROL MODEL/ MANUAL OR ATS USE
 USE

With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop
6. With Remote Teleport Communication RS 485

Parameters of Operation:

Digital type, all function showed by LED