

**Standard Features**

MODEL	GB-P65
Standby Power(50Hz)	57KW/71.5KVA
Prime Power(50Hz)	52KW/65KVA
Engine	PERKINS 1104A-44TG1
Alternator	Leroy Somer LSA 43.2 L6

- **Engine(PERKINS UK 1104A-44TG1)**
- Radiator 40°C max, fans are driven by belt, with safety guard
- 24V charge alternator
- **Alternator(Leroy Somer LSA 43.2 L6),**
- single bearing alternator, Protection Class IP22, insulation class H/H
- Dry Type air filter, fuel filter, oil filter, pre-filter, absorber
- Main line circuit breaker
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, Exhaust siphon, flange, muffler
- Operation manual



Generator Set Ratings						
Voltage	Frequency	Phase	P.F (COS $\phi$ )	Standby Amps	Standby Ratings (KW/KVA)	Prime Ratings (KW/KVA)
440/254	50	3	0.8	93.6	57/71.5	52/65
415/240	50	3	0.8	99.1	57/71.5	52/65
400/230	50	3	0.8	103	57/71.5	52/65
380/220	50	3	0.8	108	57/71.5	52/65

Prime Power(PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (equiv ISO8528); A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency

Dimension Of Generator Set	
Dimension(L*W*H)/CM For Open Type	185×90×135 CM
Net Weight/KG For Open Type	900KGS
Dimension(L*W*H)/CM For Sound Proof Type	281×106×168 CM
Net Weight/KG For Sound Proof Type	1400KGS
Dimension (L*W*H)/MM For Trailer Type	
Net Weight/KG For Trailer Type	

Specification Of Engine		
Engine	Engine Model	1104A-44TG1
	Manufacturer	PERKINS UK
	Emissions statement	EU2007(EU97/68/EC Stage II ) EPA Tier 4Final(EPA 40 CFR Part 1039 Tier 4)
	Prime Power	58.5KW/78.4HP
	Standby Power	64.3KW/86.2HP
	Engine Configuration	4Cylinder In Line, 4Stroke,Direct Injection
	Gas Feeding Model	Turbocharged
	Bore × Stroke	105 × 127 (MM)
	Displacement	4.4L
	Rated Speed	1500RPM
	Speed Governor	Electrical
	Starter Model	12V DC Start
	Fuel Consumption Prime Power (100% load)	16.2L/H
	Totally lubrication system Capacity	8.0L
	Coolant capacity	13L
	Cooling System	Water Cool
Compression Ratio	17.25:1	

Specification Of Alternator		
Alternator	Alternator Model	LSA 43.2 L6
	Manufacturer	Leroy Somer company
	Prime Output	56KW/70KVA
	Standby Output	62KW/77.5KVA
	Excitation Model	Brushless, Self-Exciting
	Cooling Method	Air Cooling
	Connection Type	3 Phase and 12 Wires "Star" Connection
	Power Factor	0.8
	Protection Class	IP22
	Insulation Class	H
	Altitude	≤ 1000m
	Voltage Regulation, Steady State	≤ ± 1%
	Telephone Influence Factor	< 50
	Sudden Voltage Warp (100% Sudden Reduce)	≤ ± 1%
	Sudden Voltage Warp (Sudden Increase)	≤ ± 25%
	Voltage Stable Time (100% Sudden Reduce)	≤ 6S
	Voltage Stable Time (Sudden Increase)	≤ 6S
	Frequency Reduce	0-5% adjustable
	Frequency Regulation, Stead State	≤ 1.5%
	Frequency Waving	≤ 0.8%
	Sudden Frequency Warp (100% Sudden Reduce)	≤ +12%
Sudden Frequency Warp (100% Sudden Increase)	≤ -10%	
Frequency Recovery Time (100% Sudden Reduce)	≤ 5S	
Frequency Recovery Time (Sudden Increase)	≤ 5S	
Compliance Standards	GB755,BS5000,VDE0530,NEMAMG1-22,IED34-1,CSA22.2 and AS1359	

**Control Panel System**




**MONICAN CONTROL MODEL/ MANUAL OR ATS USE**  
 With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop

**Parameters of Operation:**

1. Emergency Stop Button
- 2.Voltmeter and Selector Switch
3. Ammeter and Selector Switch
4. Frequency Meter
5. Hour Running Meter
- 6.Alart Buzzer

**Control Panel System**

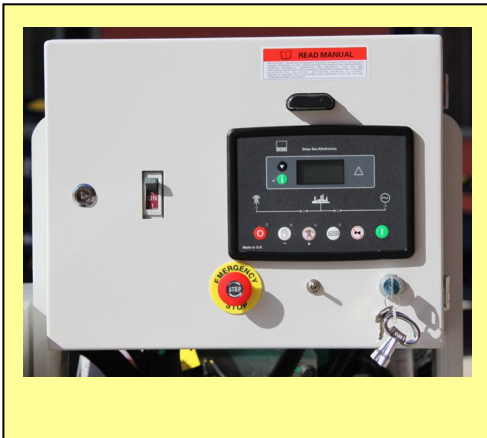

**SMARTGE CONTROL MODEL/ MANUAL OR ATS USE**  
 With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop

**Parameters of Operation:**

Digital type, all function showed by LED

**Control Panel System**



**DEEPSEA CONTROL MODEL/ MANUAL OR ATS USE**  
 With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop
6. With Remote Teleport Communication RS 485

**Parameters of Operation:**

Digital type, all function showed by LED