

Standard Features

MODEL	GB-P12.5
Standby Power(60Hz)	11KW/13.75KVA
Prime Power(60Hz)	10KW/12.5KVA
Engine	PERKINS 403D-11G
Alternator	STAMFORD PI044E

- **Engine(PERKINS.UK 403D-11G)**
- Radiator 40°C max, fans are driven by belt, with safety guard
- 24V charge alternator
- **Alternator(STAMFORD PI044E),**
- single bearing alternator, Protection Class IP23, insulation class H/H
- Dry Type air filter, fuel filter, oil filter, pre-filter, absorber
- Main line circuit breaker
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, Exhaust siphon, flange, muffler
- Operation manual



Generator Set Ratings						
Voltage	Frequency	Phase	P.F (COS ϕ)	Standby Amps	Standby Ratings (KW/KVA)	Prime Ratings (KW/KVA)
380/220	60	3	0.8	20.9	11/13.75	10/12.5
220/127	60	3	0.8	36	11/13.75	10/12.5

Prime Power(PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (equiv ISO8528); A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency

Dimension Of Generator Set	
Dimension(L*W*H)/CM For Open Type	140×65×110 CM
Net Weight/KG For Open Type	600KG
Dimension(L*W*H)/CM For Sound Proof Type	185×100×116 CM
Net Weight/KG For Sound Proof Type	800KG
Dimension (L*W*H)/MM For Trailer Type	
Net Weight/KG For Trailer Type	

Specification Of Engine		
Engine	Engine Model	403D-11G
	Manufacturer	PERKINS UK
	Emissions statement	EU2007(EU97/68/EC Stage II)
	Prime Power	10.3KW/14HP
	Standby Power	11.4KW/15.5HP
	Engine Configuration	3Cylinder In Line, 4Stroke,Direct Injection
	Gas Feeding Model	Natural Aspiration
	Bore×Stroke	77×81 (MM)
	Displacement	11/31 (CC)
	Rated Speed	1800RPM
	Speed Governor	Mechanical
	Starter Model	12V DC Start
	Fuel Consumption Prime Power (100% load)	3.8L/H
	Totally lubrication system Capacity	4.9L
	Coolant capacity	5.21L
	Cooling System	Water Cool
Compression Ratio	23:1	

Specification Of Alternator		
Alternator	Alternator Model	PI044E
	Manufacturer	STAMFORD company
	Prime Output	10KW/12.5KVA
	Standby Output	11KW/13.75KVA
	Excitation Model	Brushless, Self-Exciting
	Cooling Method	Air Cooling
	Connection Type	3 Phase and 12 Wires "Star" Connection
	Power Factor	0.8
	Protection Class	IP23
	Insulation Class	H
	Altitude	≤ 1000m
	Voltage Regulation, Steady State	≤ ± 1%
	Telephone Influence Factor	< 50
	Sudden Voltage Warp (100% Sudden Reduce)	≤ ± 1%
	Sudden Voltage Warp (Sudden Increase)	≤ ± 25%
	Voltage Stable Time (100% Sudden Reduce)	≤ 6S
	Voltage Stable Time (Sudden Increase)	≤ 6S
	Frequency Reduce	0-5% adjustable
	Frequency Regulation, Stead State	≤ 1.5%
	Frequency Waving	≤ 0.8%
Sudden Frequency Warp (100% Sudden Reduce)	≤ +12%	
Sudden Frequency Warp (100% Sudden Increase)	≤ -10%	
Frequency Recovery Time (100% Sudden Reduce)	≤ 5S	
Frequency Recovery Time (Sudden Increase)	≤ 5S	
Compliance Standards	GB755,BS5000,VDE0530,NEMAMG1-22,IED34-1,CSA22.2 and AS1359	

Control Panel System




DEEPSEA501K CONTROL MODEL/ MANUAL USE

With Four Protection

- 1. High water Temperature Shutdown
- 2. Low Oil Pressure Shutdown
- 3. Over Speed Shutdown
- 4. Over Crank Shutdown
- 5. Protection as Emergent Stop

Parameters of Operation:

- 1. Emergency Stop Button
- 2. Voltmeter and Selector Switch
- 3. Ammeter and Selector Switch
- 4. Frequency Meter
- 5. Hour Running Meter
- 6. Alarm Buzzer

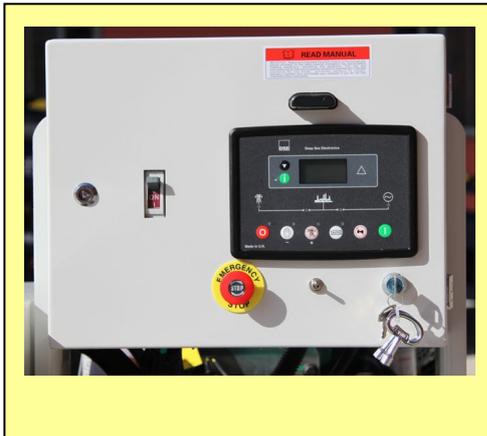

DEEPSEA6020 CONTROL MODEL/ MANUAL OR ATS USE

With Four Protection

- 1. High water Temperature Shutdown
- 2. Low Oil Pressure Shutdown
- 3. Over Speed Shutdown
- 4. Over Crank Shutdown
- 5. Protection as Emergent Stop

Parameters of Operation:

Digital type, all function showed by LED



DEEPSEA7320 CONTROL MODEL/ MANUAL OR ATS USE

With Four Protection

- 1. High water Temperature Shutdown
- 2. Low Oil Pressure Shutdown
- 3. Over Speed Shutdown
- 4. Over Crank Shutdown
- 5. Protection as Emergent Stop
- 6. With Remote Teleport Communication RS 485

Parameters of Operation: