


Standard Features

MODEL	GB-C1000
Standby Power(60Hz)	1000KW/1250KVA
Prime Power(60Hz)	900KW/1125KVA
Engine	Cummins KTA38-G4
Alternator	STAMFORD LV634D

- **Engine(CCEC Cummins KTA38-G4)**
- Radiator 40°C max, fans are driven by belt, with safety guard
- 24V charge alternator
- **Alternator(STAMFORD LVI634D),**
- single bearing alternator, Protection Class IP22, insulation class H/H
- Dry Type air filter, fuel filter, oil filter, pre-filter, absorber
- Main line circuit breaker
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, Exhaust siphon, flange, muffler
- Operation manual

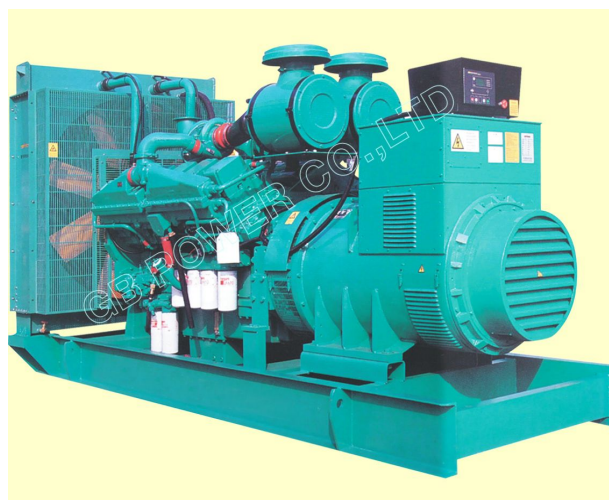

Generator Set Ratings						
Voltage	Frequency	Phase	P.F (COS ϕ)	Standby Amps	Standby Ratings (KW/KVA)	Prime Ratings (KW/KVA)
480/254	60	3	0.8	1642	1000/1250	900/1125
460/240	60	3	0.8	1739	1000/1250	900/1125
440/230	60	3	0.8	1805	1000/1250	900/1125
416/220	60	3	0.8	1901	1000/1250	900/1125

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (eqv ISO 8528); A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency

Dimension Of Generator Set	
Dimension(L*W*H)/CM For Open Type	475*210*232CM
Net Weight/KG For Open Type	7600KG
Dimension(L*W*H)/CM For Sound Proof Type	605×244×259 CM
Net Weight/KG For Sound Proof Type	13000 KG
Dimension (L*W*H)/MM For Trailer Type	
Net Weight/KG For Trailer Type	

Specification Of Engine		
Engine	Engine Model	KTA38-G4
	Manufacturer	CCEC Cummins
	Prime Power	1011KW/1355HP
	Standby Power	1112KW/1490HP
	Engine Configuration	12Cylinder In V, 4Stroke
	Gas Feeding Model	Turbocharged
	Bore×Stroke	159×159 (MM)
	Displacement	37.8L
	Rated Speed	1800RPM
	Speed Governor	Electronic
	Starter Model	24V DC Start
	Fuel Consumption Standby Power (100% load)	207 G/KW.H
	Fuel Consumption Prime Power (75% load)	214 G/KW.H
	Oil Consumption	≤4 g/Kw.h
	Cooling System	Water Cool
	Compression Ratio	13.9:1
	Max Back Pressure	10KPA
	Max Intake Restriction	6.35KPA
	Exhaust Temperature	524℃

Specification Of Alternator		
Alternator	Alternator Model	LVI634D
	Manufacturer	STAMFORD company
	Prime Output	900KW/1125KVA
	Standby Output	1000KW/1250KVA
	Excitation Model	Brushless, Self-Exciting
	Cooling Method	Air Cooling
	Connection Type	3 Phase and 12 Wires "Star" Connection
	Power Factor	0.8
	Protection Class	IP23
	Insulation Class	H
	Altitude	$\leq 1000\text{m}$
	Voltage Regulation, Steady State	$\leq \pm 1\%$
	Telephone Influence Factor	< 50
	Sudden Voltage Warp (100% Sudden Reduce)	$\leq \pm 1\%$
	Sudden Voltage Warp (Sudden Increase)	$\leq \pm 25\%$
	Voltage Stable Time (100% Sudden Reduce)	$\leq 6\text{S}$
	Voltage Stable Time (Sudden Increase)	$\leq 6\text{S}$
	Frequency Reduce	0-5% adjustable
	Frequency Regulation, Stead State	$\leq 1.5\%$
	Frequency Waving	$\leq 0.8\%$
	Sudden Frequency Warp (100% Sudden Reduce)	$\leq +12\%$
	Sudden Frequency Warp (100% Sudden Increase)	$\leq -10\%$
	Frequency Recovery Time (100% Sudden Reduce)	$\leq 5\text{S}$
	Frequency Recovery Time (Sudden Increase)	$\leq 5\text{S}$
Compliance Standards	GB755, BS5000, VDE0530, NEMAMG1-22, IED34-1, CSA22.2 and AS1359	

Control Panel System



MONICAN CONTROL MODEL/ MANUAL OR ATS USE

With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop

Parameters of Operation:

1. Emergency Stop Button
- 2.Voltmeter and Selector Switch
3. Ammeter and Selector Switch
4. Frequency Meter
5. Hour Running Meter
- 6.Alart Buzzer



SMARTGEN CONTROL MODEL/ MANUAL OR ATS USE

With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop

Parameters of Operation:

Digital type, all function showed by LED



DEEPSEA CONTROL MODEL/ MANUAL OR ATS USE

With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop
6. With Remote Teleport Communication RS 485

Parameters of Operation:

Digital type, all function showed by LED