


**Standard Features**

MODEL	GB-C250
Standby Power(60Hz)	220KW/275KVA
Prime Power(60Hz)	200KW/250KVA
Engine	Cummins 6LTAA8.9-G2
Alternator	STAMFORD UCDI 274K

- **Engine(CCEC Cummins 6LTAA8.3-G2)**
- Radiator 40°C max, fans are driven by belt, with safety guard
- 24V charge alternator
- **Alternator(STAMFORD UCDI 274K),**
- single bearing alternator, Protection Class IP23, insulation class H/H
- Dry Type air filter, fuel filter, oil filter, pre-filter, absorber
- Main line circuit breaker
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, Exhaust siphon, flange, muffler
- Operation manual

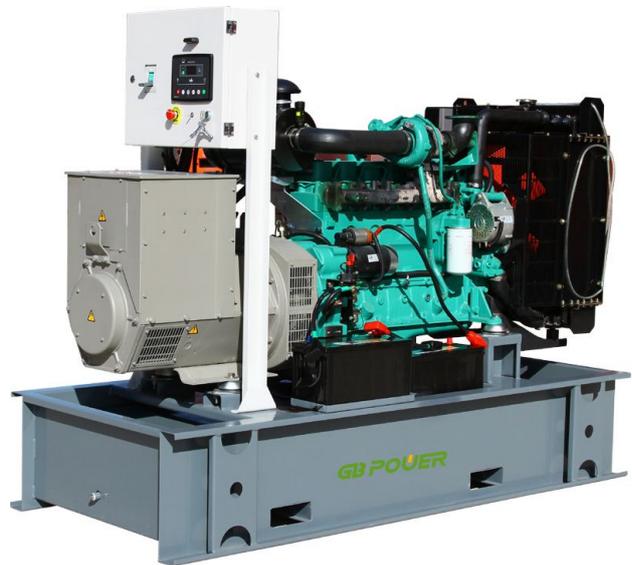

Generator Set Ratings						
Voltage	Frequency	Phase	P.F (COS $\phi$ )	Standby Amps	Standby Ratings (KW/KVA)	Prime Ratings (KW/KVA)
440/254	50	3	0.8	361	220/275	200/250
415/240	50	3	0.8	382.6	220/275	200/250
400/230	50	3	0.8	397	220/275	200/250
380/220	50	3	0.8	418	220/275	200/250

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (equiv ISO8528); A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency

Dimension Of Generator Set	
Dimension(L*W*H)/CM For Open Type	254×95×167 CM
Net Weight/KG For Open Type	2200KG
Dimension(L*W*H)/CM For Sound Proof Type	359×125×205CM
Net Weight/KG For Sound Proof Type	2900KG
Dimension (L*W*H)/MM For Trailer Type	
Net Weight/KG For Trailer Type	

Specification Of Engine		
Engine	Engine Model	6LTAA8.9-G2
	Manufacturer	DCEC Cummins
	Prime Power	245KW/328HP
	Standby Power	269.5KW/361HP
	Engine Configuration	6Cylinder In Line, 4Stroke
	Gas Feeding Model	Turbocharged
	Bore×Stroke	114×135 (MM)
	Displacement	8.9L
	Rated Speed	1800RPM
	Speed Governor	Electronic
	Starter Model	24V DC Start
	Fuel Consumption Standby Power (100% load)	197 g/Kw.h
	Fuel Consumption Prime Power (75% load)	197 g/Kw.h
	Oil Consumption	≤4 g/kw.h
	Cooling System	Water Cool
	Compression Ratio	16.0:1
	Max Back Pressure	10KPA
	Max Intake Restriction	6.35KPA
Exhaust Temperature	470°C	


Specification Of Alternator		
Alternator	Alternator Model	UCDI 274K
	Manufacturer	STAMFORD company
	Prime Output	200KW/250KVA
	Standby Output	220KW/275KVA
	Excitation Model	Brushless, Self-Exciting
	Cooling Method	Air Cooling
	Connection Type	3 Phase and 12 Wires "Star" Connection
	Power Factor	0.8
	Protection Class	IP23
	Insulation Class	H
	Altitude	≤1000m
	Voltage Regulation, Steady State	≤ ± 1%
	Telephone Influence Factor	< 50
	Sudden Voltage Warp (100% Sudden Reduce)	≤ ± 1%
	Sudden Voltage Warp (Sudden Increase)	≤ ± 25%
	Voltage Stable Time (100% Sudden Reduce)	≤ 6S
	Voltage Stable Time (Sudden Increase)	≤ 6S
	Frequency Reduce	0-5% adjustable
	Frequency Regulation, Stead State	≤ 1.5%
	Frequency Waving	≤ 0.8%
Sudden Frequency Warp (100% Sudden Reduce)	≤ +12%	
Sudden Frequency Warp (100% Sudden Increase)	≤ -10%	
Frequency Recovery Time (100% Sudden Reduce)	≤ 5S	
Frequency Recovery Time (Sudden Increase)	≤ 5S	
Compliance Stands	GB755,BS5000,VDE0530,NEMAMG1-22,IED34-1,CSA22.2 and AS1359	

**Control Panel System**



**DEEPSEA501K CONTROL MODEL/ MANUAL USE**  
 With Four Protection  
 1.High water Temperature Shutdown  
 2. Low Oil Pressure Shutdown  
 3. Over Speed Shutdown 4. Over Crank Shutdown  
 5. Protection as Emergent Stop  
**Parameters of Operation:**  
 1. Emergency Stop Button 2.Voltmeter and Selector Switch  
 3. Ammeter and Selector Switch 4. Frequency Meter  
 5. Hour Running Meter6.Alart Buzzer

**Control Panel System**

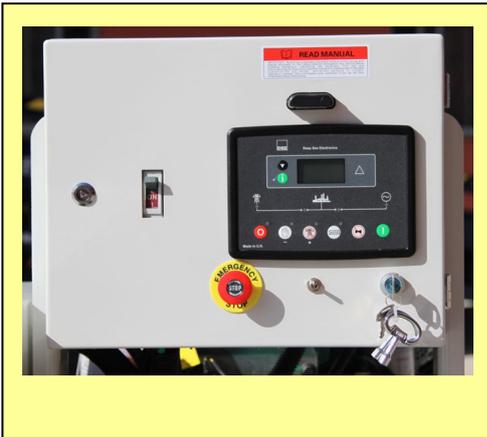

**DEEPSEA6020 CONTROL MODEL/ MANUAL OR ATS USE**  
 With Four Protection  
 1.High water Temperature Shutdown  
 2. Low Oil Pressure Shutdown  
 3. Over Speed Shutdown  
 4. Over Crank Shutdown  
 5. Protection as Emergent Stop  
**Parameters of Operation:**  
 Digital type, all function showed by LED

**Control Panel System**



**DEEPSEA7320 CONTROL MODEL/ MANUAL OR ATS USE**  
 With Four Protection  
 1.High water Temperature Shutdown  
 2. Low Oil Pressure Shutdown  
 3. Over Speed Shutdown  
 4. Over Crank Shutdown  
 5. Protection as Emergent Stop  
 6. With Remote Teleport Communication RS 485  
**Parameters of Operation:**