

Standard Features

MODEL	GB-P230
Standby Power(50Hz)	202KW/253KVA
Prime Power(50Hz)	184KW/230KVA
Engine	PERKINS 1306C-E87TAG4
Alternator	STAMFORD UCI274J

- **Engine(PERKINSUK1306C-E87TAG4)**
- Radiator 40°C max, fans are driven by belt, with safety guard
- 24V charge alternator
- **Alternator(STAMFORD UCI274J),**
- single bearing alternator, Protection Class IP22, insulation class H/H
- Dry Type air filter, fuel filter, oil filter, pre-filter, absorber
- Main line circuit breaker
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, Exhaust siphon, flange, muffler
- Operation manual



Generator Set Ratings						
Voltage	Frequency	Phase	P.F (COS ϕ)	Standby Amps	Standby Ratings (KW/KVA)	Prime Ratings (KW/KVA)
440/254	50	3	0.8	332	202/253	184/230
415/240	50	3	0.8	351	202/253	184/230
400/230	50	3	0.8	365	202/253	184/230
380/220	50	3	0.8	384	202/253	184/230

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (equiv ISO8528); A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency

Dimension Of Generator Set	
Dimension(L*W*H)/CM For Open Type	250×100×165 CM
Net Weight/KG For Open Type	1650KGS
Dimension(L*W*H)/CM For Sound Proof Type	360×135×195 CM
Net Weight/KG For Sound Proof Type	2400KGS
Dimension (L*W*H)/MM For Trailer Type	
Net Weight/KG For Trailer Type	

Specification Of Engine		
Engine	Engine Model	1306C-E87TAG4
	Manufacturer	PERKINS UK
	Emissions statement	EU2007(EU97/68/EC Stage II) EPA Tier 4Final(EPA 40 CFR Part 1039 Tier 4)
	Prime Power	198KW/265HP
	Standby Power	217KW/291HP
	Engine Configuration	6Cylinder In Line, 4Stroke,Direct Injection
	Gas Feeding Model	Turbocharged Air-Air cooled
	Bore × Stroke	116.6 × 135.9 (MM)
	Displacement	8.7L
	Rated Speed	1500RPM
	Speed Governor	Electrical
	Starter Model	24V DC Start
	Fuel Consumption Prime Power (100% load)	48.5L/H
	Totally lubrication system Capacity	26.4L
	Coolant capacity	37.2L
	Cooling System	Water Cool
Compression Ratio	16.9:1	

Specification Of Alternator		
Alternator	Alternator Model	UCI274J
	Manufacturer	STAMFORD company
	Prime Output	184KW/230KVA
	Standby Output	202KW/253KVA
	Excitation Model	Brushless, Self-Exciting
	Cooling Method	Air Cooling
	Connection Type	3 Phase and 12 Wires "Star" Connection
	Power Factor	0.8
	Protection Class	IP22
	Insulation Class	H
	Altitude	≤ 1000m
	Voltage Regulation, Steady State	≤ ± 1%
	Telephone Influence Factor	< 50
	Sudden Voltage Warp (100% Sudden Reduce)	≤ ± 1%
	Sudden Voltage Warp (Sudden Increase)	≤ ± 25%
	Voltage Stable Time (100% Sudden Reduce)	≤ 6S
	Voltage Stable Time (Sudden Increase)	≤ 6S
	Frequency Reduce	0-5% adjustable
	Frequency Regulation, Stead State	≤ 1.5%
	Frequency Waving	≤ 0.8%
Sudden Frequency Warp (100% Sudden Reduce)	≤ +12%	
Sudden Frequency Warp (100% Sudden Increase)	≤ -10%	
Frequency Recovery Time (100% Sudden Reduce)	≤ 5S	
Frequency Recovery Time (Sudden Increase)	≤ 5S	
Compliance Standards	GB755,BS5000,VDE0530,NEMAMG1-22,IED34-1,CSA22.2 and AS1359	

Control Panel System




MONICAN CONTROL MODEL/ MANUAL OR ATS USE

With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop

Parameters of Operation:

1. Emergency Stop Button
- 2.Voltmeter and Selector Switch
3. Ammeter and Selector Switch
4. Frequency Meter
5. Hour Running Meter
- 6.Alart Buzzer

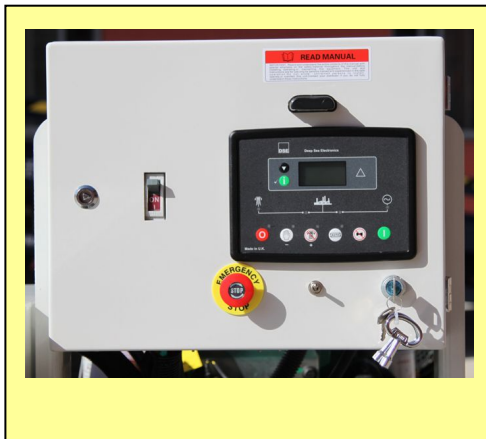

SMARTGE CONTROL MODEL/ MANUAL OR ATS USE

With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop

Parameters of Operation:

Digital type, all function showed by LED



DEEPSEA CONTROL MODEL/ MANUAL OR ATS USE

With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop
6. With Remote Teleport Communication RS 485

Parameters of Operation:

Digital type, all function showed by LED