

Standard Features

MODEL	GB-P625
Standby Power(50Hz)	550KW/687.5KVA
Prime Power(50Hz)	500KW/625KVA
Engine	PERKINS 2806A-E18TAG2
Alternator	STAMFORD HCI544FS

- **Engine(PERKINS UK 2806A-E18TAG2)**
- Radiator 40°C max, fans are driven by belt, with safety guard
- 24V charge alternator
- **Alternator(STAFMORD HCI544FS),**
- single bearing alternator, Protection Class IP23, insulation class H/H
- Dry Type air filter, fuel filter, oil filter, pre-filter, absorber
- Main line circuit breaker
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, Exhaust siphon, flange, muffler
- Operation manual



Generator Set Ratings						
Voltage	Frequency	Phase	P.F (COS ϕ)	Standby Amps	Standby Ratings (KW/KVA)	Prime Ratings (KW/KVA)
440/254	50	3	0.8	903	550/687.5	500/625
415/240	50	3	0.8	957	550/687.5	500/625
400/230	50	3	0.8	993	550/687.5	500/625
380/220	50	3	0.8	1046	550/687.5	500/625

Prime Power(PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (equiv ISO8528); A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency

Dimension Of Generator Set	
Dimension(L*W*H)/CM For Open Type	390×160×220 CM
Net Weight/KG For Open Type	4400KGS
Dimension(L*W*H)/CM For Sound Proof Type	606×244×260 CM
Net Weight/KG For Sound Proof Type	6300KGS
Dimension (L*W*H)/MM For Trailer Type	
Net Weight/KG For Trailer Type	

Specification Of Engine		
Engine	Engine Model	2806A-E18TAG2
	Manufacturer	PERKINS UK
	Emissions statement	EU2007(EU97/68/EC Stage II)
	Prime Power	565KW/757HP
	Standby Power	609KW/816HP
	Engine Configuration	6Cylinder In Line, 4Stroke,Direct Injection
	Gas Feeding Model	Turbocharged Air-Air after cooled
	Bore× Stroke	145× 183 (MM)
	Displacement	18.1L
	Rated Speed	1500RPM
	Speed Governor	Electrical
	Starter Model	24V DC Start
	Fuel Consumption Prime Power (100% load)	143L/H
	Totally lubrication system Capacity	62L
	Coolant capacity	61L
	Cooling System	Water Cool
Compression Ratio	14.5:1	

Specification Of Alternator		
Alternator	Alternator Model	HCI544FS
	Manufacturer	STAMFORD company
	Prime Output	500KW/625KVA
	Standby Output	550KW/687.5KVA
	Excitation Model	Brushless, Self-Exciting
	Cooling Method	Air Cooling
	Connection Type	3 Phase and 12 Wires "Star" Connection
	Power Factor	0.8
	Protection Class	IP22
	Insulation Class	H
	Altitude	≤ 1000m
	Voltage Regulation, Steady State	≤ ± 1%
	Telephone Influence Factor	< 50
	Sudden Voltage Warp (100% Sudden Reduce)	≤ ± 1%
	Sudden Voltage Warp (Sudden Increase)	≤ ± 25%
	Voltage Stable Time (100% Sudden Reduce)	≤ 6S
	Voltage Stable Time (Sudden Increase)	≤ 6S
	Frequency Reduce	0-5% adjustable
	Frequency Regulation, Stead State	≤ 1.5%
	Frequency Waving	≤ 0.8%
	Sudden Frequency Warp (100% Sudden Reduce)	≤ +12%
Sudden Frequency Warp (100% Sudden Increase)	≤ -10%	
Frequency Recovery Time (100% Sudden Reduce)	≤ 5S	
Frequency Recovery Time (Sudden Increase)	≤ 5S	
Compliance Standards	GB755,BS5000,VDE0530,NEMAMG1-22,IED34-1,CSA22.2 and AS1359	

Control Panel System




DEEPSEA501K CONTROL MODEL/ MANUAL USE

With Four Protection

- 1.High water Temperature Shutdown
- 2. Low Oil Pressure Shutdown
- 3. Over Speed Shutdown 4. Over Crank Shutdown
- 5. Protection as Emergent Stop

Parameters of Operation:

- 1. Emergency Stop Button 2.Voltmeter and Selector Switch
- 3. Ammeter and Selector Switch 4. Frequency Meter
- 5. Hour Running Meter6.Alart Buzzer

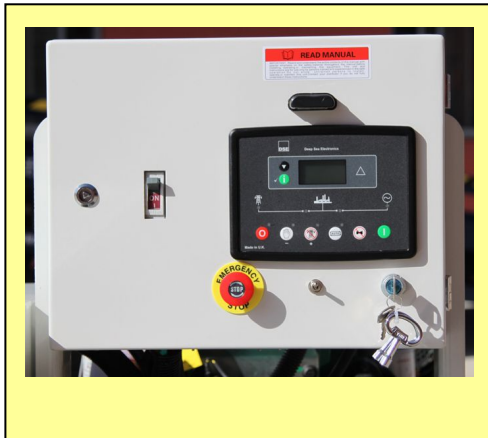

DEEPSEA6020 CONTROL MODEL/ MANUAL OR ATS USE

With Four Protection

- 1.High water Temperature Shutdown
- 2. Low Oil Pressure Shutdown
- 3. Over Speed Shutdown
- 4. Over Crank Shutdown
- 5. Protection as Emergent Stop

Parameters of Operation:

Digital type, all function showed by LED



DEEPSEA CONTROL MODEL/ MANUAL OR ATS USE

With Four Protection

- 1.High water Temperature Shutdown
- 2. Low Oil Pressure Shutdown
- 3. Over Speed Shutdown
- 4. Over Crank Shutdown
- 5. Protection as Emergent Stop
- 6. With Remote Teleport Communication RS 485

Parameters of Operation:

Digital type, all function showed by LED