


Standard Features

MODEL	GB-C1250
Standby Power(60Hz)	1100KW/1375KVA
Prime Power(60Hz)	1000KW/1250KVA
Engine	Cummins KTA38-G9
Alternator	STAMFORD LVI634E

- **Engine(CCEC Cummins KTA38-G9)**
- Radiator 40°C max, fans are driven by belt, with safety guard
- 24V charge alternator
- **Alternator(STAMFORD LVI634E),**
- single bearing alternator, Protection Class IP23, insulation class H/H
- Dry Type air filter, fuel filter, oil filter, pre-filter, absorber
- Main line circuit breaker
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, Exhaust siphon, flange, muffler
- Operation manual

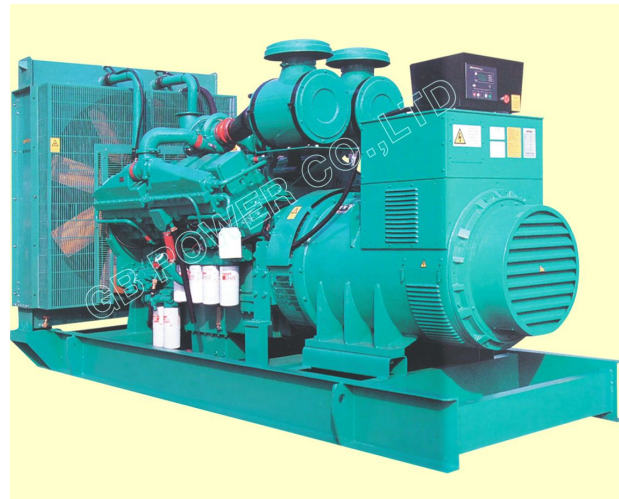

Generator Set Ratings						
Voltage	Frequency	Phase	P.F (COS ϕ)	Standby Amps	Standby Ratings (KW/KVA)	Prime Ratings (KW/KVA)
380/220	60	3	0.8	2091	1100/1375	1000/1250
220/127	60	3	0.8	3607	1100/1375	1000/1250

Prime Power(PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (equiv ISO8528); A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency

Dimension Of Generator Set	
Dimension(L*W*H)/CM For Open Type	500×220×220 CM
Net Weight/KG For Open Type	11500 KG
Dimension(L*W*H)/CM For Sound Proof Type	20FT
Net Weight/KG For Sound Proof Type	15000 KG
Dimension (L*W*H)/MM For Trailer Type	
Net Weight/KG For Trailer Type	

Specification Of Engine		
Engine	Engine Model	KTA38–G9
	Manufacturer	CCEC Cummins
	Prime Power	1110KW/1510HP
	Standby Power	1220KW/1659HP
	Engine Configuration	6Cylinder In Line, 4Stroke,Direct Injection
	Gas Feeding Model	Turbo Charged
	Bore× Stroke	159× 159 (MM)
	Displacement	37.8L
	Rated Speed	1500RPM
	Speed Governor	High Precision Electronic Speed Control System
	Starter Model	24V DC Start
	Fuel Consumption Standby Power (110% load)	292.6L/H
	Fuel Consumption Prime Power (100% load)	266L/H
	Oil Consumption	≤0.24L/H
	Cooling System	Water Cool
	Compression Ratio	13.9:1
	Max Back Pressure	10KPA
	Intake Flow L/S	34780/S
Exhaust Temperature	536℃	

Specification Of Alternator

Alternator	Alternator Model	LVI634E
	Manufacturer	STAMFORD company
	Prime Output	1000KW/1250KVA
	Standby Output	1100KW/1375KVA
	Excitation Model	Brushless, Self-Exciting
	Cooling Method	Air Cooling
	Connection Type	3 Phase and 12 Wires "Star" Connection
	Power Factor	0.8
	Protection Class	IP23
	Insulation Class	H
	Altitude	≤1000m
	Voltage Regulation, Steady State	≤ ± 1%
	Telephone Influence Factor	< 50
	Sudden Voltage Warp (100% Sudden Reduce)	≤ ± 1%
	Sudden Voltage Warp (Sudden Increase)	≤ ± 25%
	Voltage Stable Time (100% Sudden Reduce)	≤ 6S
	Voltage Stable Time (Sudden Increase)	≤ 6S
	Frequency Reduce	0-5% adjustable
	Frequency Regulation, Stead State	≤ 1.5%
	Frequency Waving	≤ 0.8%
	Sudden Frequency Warp (100% Sudden Reduce)	≤ +12%
Sudden Frequency Warp (100% Sudden Increase)	≤ -10%	
Frequency Recovery Time (100% Sudden Reduce)	≤ 5S	
Frequency Recovery Time (Sudden Increase)	≤ 5S	
Compliance Stands	GB755,BS5000,VDE0530,NEMAMG1-22,IED34-1,CSA22.2 and AS1359	

Control Panel System




MONICAN CONTROL MODEL/ MANUAL OR ATS USE
 With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop

Parameters of Operation:

1. Emergency Stop Button
- 2.Voltmeter and Selector Switch
3. Ammeter and Selector Switch
4. Frequency Meter
5. Hour Running Meter
- 6.Alart Buzzer

Control Panel System

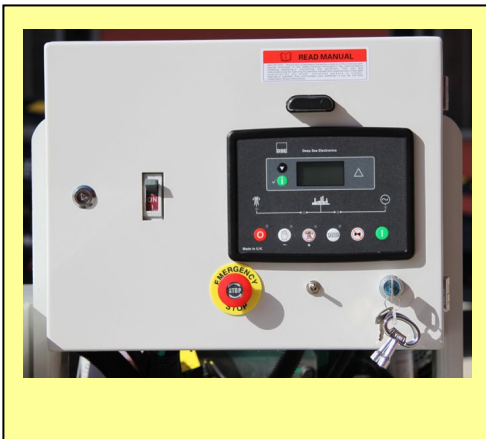

SMARTGEN CONTROL MODEL/ MANUAL OR ATS USE
 USE

With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop

Parameters of Operation:

Digital type, all function showed by LED

Control Panel System



DEEPSEA CONTROL MODEL/ MANUAL OR ATS USE
 USE

With Four Protection

- 1.High water Temperature Shutdown
2. Low Oil Pressure Shutdown
3. Over Speed Shutdown
4. Over Crank Shutdown
5. Protection as Emergent Stop
6. With Remote Teleport Communication RS 485

Parameters of Operation:

Digital type, all function showed by LED