

**Standard Features**

MODEL	GB-P245
Standby Power(60Hz)	215KW/268KVA
Prime Power(60Hz)	195KW/245KVA
Engine	PERKINS 1306C-E87TAG4
Alternator	STAMFORD UCI274H

- **Engine(PERKINSUK1306C-E87TAG4)**
- Radiator 40°C max, fans are driven by belt, with safety guard
- 24V charge alternator
- **Alternator(STAMFORD UCI274H),**
- single bearing alternator, Protection Class IP22, insulation class H/H
- Dry Type air filter, fuel filter, oil filter, pre-filter, absorber
- Main line circuit breaker
- Standard control panel
- Two 12V batteries, rack and cable
- Ripple flex exhaust pipe, Exhaust siphon, flange, muffler
- Operation manual



Generator Set Ratings						
Voltage	Frequency	Phase	P.F (COS $\phi$ )	Standby Amps	Standby Ratings (KW/KVA)	Prime Ratings (KW/KVA)
480/277	60	3	0.8	323	215/268	195/245
460/266	60	3	0.8	338	215/268	195/245
440/254	60	3	0.8	352	215/268	195/245
416/240	60	3	0.8	373	215/268	195/245

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820-97 (equiv ISO8528); A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency

Dimension Of Generator Set	
Dimension(L*W*H)/CM For Open Type	250×100×165 CM
Net Weight/KG For Open Type	1650KG
Dimension(L*W*H)/CM For Sound Proof Type	350*135×195 CM
Net Weight/KG For Sound Proof Type	2400KG
Dimension (L*W*H)/MM For Trailer Type	
Net Weight/KG For Trailer Type	

Specification Of Engine		
Engine	Engine Model	1306C-E87TAG4
	Manufacturer	PERKINS UK
	Emissions statement	EU2007(EU97/68/EC Stage II ) EPA Tier 4Final(EPA 40 CFR Part 1039 Tier 4)
	Prime Power	213KW/285HP
	Standby Power	235KW/315HP
	Engine Configuration	6Cylinder In Line, 4Stroke,Direct Injection
	Gas Feeding Model	Turbocharged Air Air cooled
	Bore×Stroke	116.6×135.9 (MM)
	Displacement	8.7L
	Rated Speed	1800RPM
	Speed Governor	Electrical
	Starter Model	24V DC Start
	Fuel Consumption Prime Power (100% load)	54.4L/H
	Totally lubrication system Capacity	26.4L
	Coolant capacity	37.2L
	Cooling System	Water Cool
Compression Ratio	16.9:1	

Specification Of Alternator		
Alternator	Alternator Model	UCI274H
	Manufacturer	STAMFORD company
	Prime Output	204KW/255KVA
	Standby Output	224KW/280KVA
	Excitation Model	Brushless, Self-Exciting
	Cooling Method	Air Cooling
	Connection Type	3 Phase and 12 Wires "Star" Connection
	Power Factor	0.8
	Protection Class	IP22
	Insulation Class	H
	Altitude	≤ 1000m
	Voltage Regulation, Steady State	≤ ± 1%
	Telephone Influence Factor	< 50
	Sudden Voltage Warp (100% Sudden Reduce)	≤ ± 1%
	Sudden Voltage Warp (Sudden Increase)	≤ ± 25%
	Voltage Stable Time (100% Sudden Reduce)	≤ 6S
	Voltage Stable Time (Sudden Increase)	≤ 6S
	Frequency Reduce	0-5% adjustable
	Frequency Regulation, Stead State	≤ 1.5%
	Frequency Waving	≤ 0.8%
Sudden Frequency Warp (100% Sudden Reduce)	≤ +12%	
Sudden Frequency Warp (100% Sudden Increase)	≤ -10%	
Frequency Recovery Time (100% Sudden Reduce)	≤ 5S	
Frequency Recovery Time (Sudden Increase)	≤ 5S	
Compliance Standards	GB755,BS5000,VDE0530,NEMAMG1-22,IED34-1,CSA22.2 and AS1359	

**Control Panel System**




**MONICAN CONTROL MODEL/ MANUAL OR ATS USE**

With Four Protection

- 1.High water Temperature Shutdown
- 2. Low Oil Pressure Shutdown
- 3. Over Speed Shutdown
- 4. Over Crank Shutdown
- 5. Protection as Emergent Stop

**Parameters of Operation:**

- 1. Emergency Stop Button
- 2.Voltmeter and Selector Switch
- 3. Ammeter and Selector Switch
- 4. Frequency Meter
- 5. Hour Running Meter
- 6.Alart Buzzer

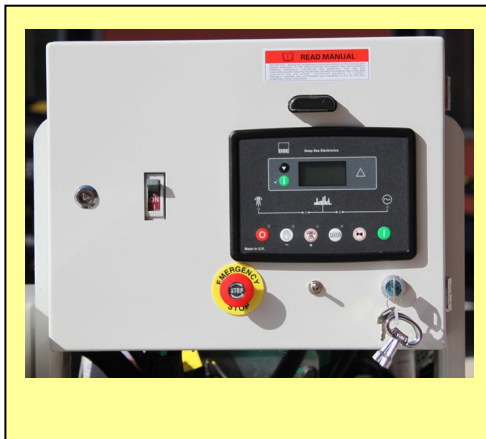

**SMARTGE CONTROL MODEL/ MANUAL OR ATS USE**

With Four Protection

- 1.High water Temperature Shutdown
- 2. Low Oil Pressure Shutdown
- 3. Over Speed Shutdown
- 4. Over Crank Shutdown
- 5. Protection as Emergent Stop

**Parameters of Operation:**

Digital type, all function showed by LED



**DEEPSEA CONTROL MODEL/ MANUAL OR ATS USE**

With Four Protection

- 1.High water Temperature Shutdown
- 2. Low Oil Pressure Shutdown
- 3. Over Speed Shutdown
- 4. Over Crank Shutdown
- 5. Protection as Emergent Stop
- 6. With Remote Teleport Communication RS 485

**Parameters of Operation:**

Digital type, all function showed by LED